

NOVO digy

Numeric combination keypad



Accessories



EASY AND SECURE TO INSTALL

NOVO digy is the KINGgates numeric combination keypad via radio that can control up to 3 automation with a security code and also has a direct channel without numeric code combination. NOVO digy is programmed as a simple remote control and provides maximum security through the MASTER code changed or deleted only by the installer.

INNOVATIVE DESIGN

NOVO digy is the perfect combination of aesthetic design and installation flexibility. Designed to be installed vertically with screen printing of the numbers on the front, you can install NOVO digy horizontally by applying a rigid label (included in the package rotating the numbers of 90 degrees). Like every product of the NOVO line you can install the device on recess box 503.

COMPATABILITY


NOVO digy is compatible with all KINGgates control units produced as of January 2010 Version "NR" and with receivers FRED MYO 2v2 and NOVO RX2.

Available versions

Code	Description
NOVO digy	Numeric radio keypad . 4 channels 433.92MHz
NOVO dwire	Numeric wired keypad (available in 2011)
BAT-AAA	Replacement AAA ministilo batteries 2 pc pack

Technical data

Frequency	433,92 MHz
Nominal range	100 m
Coding	Rolling code
Power supply	2 x 1,5 V
Batteries	2 x ministilo AAA
Dimensions	mm 109 x 65 x 35
Protection level	IP 54

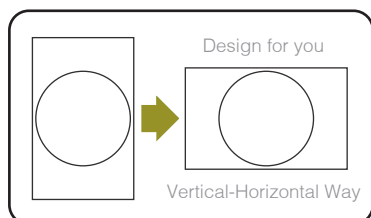

Metalic alloy protection dust painted